


DAIRY LANE
SYSTEMS LTD.

DRINKERS



www.dlsbarnsolutions.ca

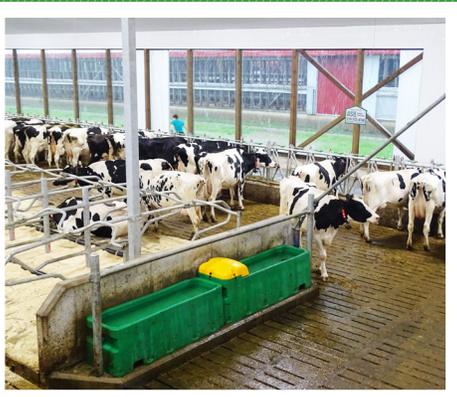

LA BUVETTE > PEN & TIE STALL WATERING SOLUTIONS

POLYSTALL SINGLE

Single-access wall-mounted stainless steel drinker with constant water level and double-walled polyethylene door.

FLOW RATE: 32 lpm/9 gpm at 43.5 psi.

Connection 1/2"

WATER CAPACITY: 10 L/2.6 gal



POLYSTALL FLOAT AND VALVE



POLYSTALL DRAIN

POLYSTALLS

PART NUMBER	DESCRIPTION
54544	WATERER – POLYSTALL SINGLE PREMIUM
54543	WATERER – POLYSTALL TWIN PREMIUM

POLYSTALL DOUBLE



FLOW RATE: 32 lpm/9 gpm at 43.5 psi.

Connection 1/2"

WATER CAPACITY: 19 L/5 gal

POLYSTALL SPECIFICATIONS

- MADE OF STAINLESS STEEL
- COMPACT AND STURDY
- INWARD FOLDED NON-SPILL EDGE
- GATE OR WALL MOUNTING
- POLYETHYLENE DOOR(S)
- ANIMALS CAN ACCESS FROM FRONT OR SIDE DEPENDING ON HOW IT IS MOUNTED (POLYSTALL SINGLE)
- CONNECTION TO THE WATER SUPPLY IS POSSIBLE FROM BOTH THE LEFT AND THE RIGHT
- LARGE FLOAT VALVE WITH ADJUSTABLE HEIGHT
- DRAIN PLUG FOR EASY CLEANING



LA BUVETTE > PEN & TIE STALL WATERING SOLUTIONS

NORMANDY

COMPACT HDPE DRINKER WITH CONSTANT LEVEL.

FLOW RATE: 8 lpm/2 gpm at 43.5 psi.
WATER CAPACITY: 4.5 L/1.1 gal




**4 WALL FIXING POINTS.
INSTALLATION WITH OR WITHOUT STAND TO SUIT THE TYPE OF ANIMAL AND THE DIRECTION OF THE WATER SUPPLY.**



CLEANOBAC

FLOW RATE:
36 lpm/9 gpm at 43.5 psi.
WATER CAPACITY:
40 L/11 gal

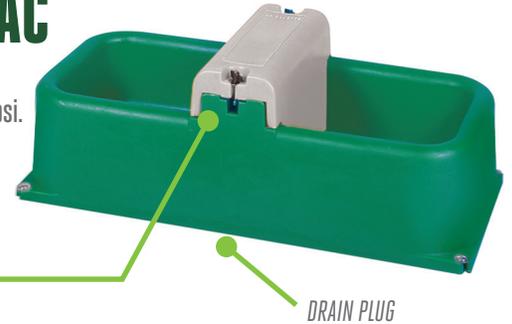

THE WATER IS REPLACED 100 TIMES/DAY

- GOOD WATER REPLACEMENT THANKS TO THE HIGH FLOW RATE FLOAT VALVE
- LITTLE UNUSED WATER REMAINS IN THE CLEANOBAC: FROM 15 TO 40 LITRES (4-10.5 GALLONS) SUBJECT TO THE SETTING OF THE FLOAT HEIGHT
- EASY TO CLEAN: SMOOTH WALLS WITHOUT NOOKS AND CRANNIES. CLEANOBAC FEATURES A DRAIN PLUG AND A WATER SHUT OFF PIN
- VERY STURDY: DOUBLE WALL OF HIGH DENSITY POLYETHYLENE

F110

STAINLESS STEEL BOWL WITH ROUNDED EDGE TO AVOID WATER SPILLING.

FLOW RATE: 18 lpm/5 gpm at 43.5 psi.



PART NUMBER	DESCRIPTION
54938	WATERER - NORMANDY - CONSTANT LEVEL
54939	WATERER - NORMANDY - PE STAND
55075	WATERER - CLEANOBAC - POLY - 38" - C/W FLOAT
54937	WATERER - F110 - SS - C/W 3/4" VALVE

WATER HEATING OPTIONS (110V)

PART NUMBER	DESCRIPTION
52595	MULTI ACCESS - MULTI TWIN S - IMMERSION STYLE HEATER - 110V, 250W
55466	COMPATIBLE WITH ALL TROUGHS - SELF-REGULATING HEAT CABLE - 110V, 250 W
*55467	POLYSTALL - BAIKAL 230 - MICHIGAN DUO - STUD MOUNTED HEATER - 110V, 250W
55609	HEATING ELEMENT THERMOSTAT (*REQUIRED FOR PART# 55467)



LA BUVETTE > TROUGH STYLE WATERING SOLUTIONS

MULTI ACCESS

LARGE INDOOR WATER TROUGH MADE FROM HIGH DENSITY POLYETHYLENE TO QUICKLY SATISFY THE ANIMALS' WATER NEEDS AFTER BEING MILKED.



10 MOUNTING POINTS ON A SOLID CONCRETE BASE OF AT LEAST 8" (REQUIRED)

EASY CLEANING: no nooks and crannies, quickly drained (4" drain)

EASY INSTALLATION: ten floor mounting points

FLOW RATE: 36 lpm/9 gpm at 43.5 psi.

WATER CAPACITY: 145 L/38 gal



Multi Access float.



Quick screw off drain plug.

PART NUMBER	DESCRIPTION
54548	WATERER - MULTI ACCESS - POLY - 85" C/W FLOAT
55133	WATERER - MULTI TWIN S - POLY - 160" - C/W FLOAT - DOUBLE
55570	WATERER - MULTI TWIN S - POLY - 85" - C/W FLOAT - SINGLE

MULTI TWIN S

• FLEXIBLE PIPE CONNECTION BETWEEN TROUGH.

• 2.36' W X 2.66' H X 13.65' L

FLOW RATE: 64 lpm/17 gpm at 43.5 psi.

WATER CAPACITY: 200 L/53 gal per trough extension



MULTI TWIN - DOUBLE



MULTI TWIN - SINGLE




MULTI TWIN - EXTENSION ONLY

(This image is for reference only - this is exclusively sold as a complete set to make up the Multi Twin - Double)



Multi Twin double float.



Multi Twin connection.



LA BUVETTE > TROUGH STYLE WATERING SOLUTIONS

BAIKAL 230

LARGE WATERER WITH STAINLESS STEEL TROUGH AND FOAMED POLYETHYLENE BASE. VALVE AND TROUGH DESIGN FOR LARGE HERDS. UP TO 5 ANIMALS CAN DRINK AT THE SAME TIME.

FLOW RATE: 72 lpm/19 gpm at 43.5 psi.

WATER CAPACITY: 112 L/30 gal

PART NUMBER	DESCRIPTION
54547	WATERER - BAIKAL - POLY W/ SS TROUGH - 90" C/W FLOAT



MICHIGAN DUO

STAINLESS STEEL DRINKER.

FLOW RATE: 72 lpm/19 gpm at 43.5 psi.

WATER CAPACITY: 52 L/14 gal

PART NUMBER	DESCRIPTION
54846	MICHIGAN DUO



THE MICHIGAN DUO ADVANTAGE

- EXCELLENT RESISTANCE TO THE COLD
- NON-SPILL STAINLESS STEEL EDGE LIMITS WATER LOSS
- QUICK WATER SUPPLY FOR HIGH DRINKING COMFORT
- EASY CLEANING

LA BUVETTE > ENERGY FREE DRINKERS

THERMOLAC

WHILE THE ANIMALS DRINK, THE DRINKER IS FILLED WITH FRESH WATER AND THE DOUBLE WALL, FILLED WITH HIGH DENSITY POLYURETHANE FOAM, KEEPS IT AT CONSTANT TEMPERATURE.

PART NUMBER	DESCRIPTION
55134	WATERER - ENERGY FREE - POLY - 1 HOLE
55135	WATERER - ENERGY FREE - POLY - 2 HOLE
55136	WATERER - ENERGY FREE - POLY - 4 HOLE

FLOW RATE: 34 lpm/9 gpm at 43.5 psi. (1 and 2 hole)

WATER CAPACITY: 40 L/11 gal (1 hole)

WATER CAPACITY: 75 L/19.8 gal (2 hole)

FLOW RATE: 72 lpm/19 gpm at 43.5 psi. (4 hole)

WATER CAPACITY: 180 L/47.5 gal (4 hole)



ENERGY FREE DRINKERS


- FROST-FREE WITHOUT POWER SUPPLY DOWN TO -22°F (-30°C)
- PERFECT FOR OUTDOOR AND INDOOR USE
- CONTAIN A DOUBLE HDPE WALL THAT IS WELL INSULATED WITH 2"-3" OF POLYURETHANE FOAM



LA BUVETTE > STAINLESS STEEL TIP & DRAIN TROUGHS

STAINLESS STEEL TIP TROUGHS WITH HEAVY DUTY GALVANIZED FRAME (60" AND 90" SIZES)


FLOW RATE: 72 lpm/19 gpm at 43.5 psi.
 WATER CAPACITY: 66 L/17.4 gal (60")
 WATER CAPACITY: 112 L/30 gal (90")

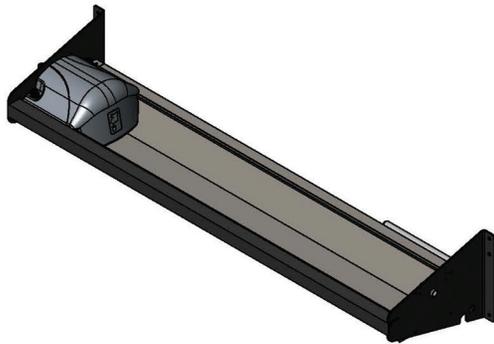


STAINLESS STEEL DRAIN TROUGHS (60", 90" AND 120" SIZES)

FLOW RATE: 72 lpm/19 gpm at 43.5 psi.
 WATER CAPACITY: 66 L/17.4 gal (60")

WATER CAPACITY: 112 L/30 gal (90")
 WATER CAPACITY: 144 L/38 gal (120")

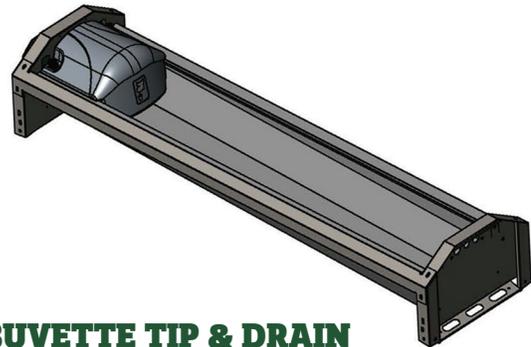

*LA BUVETTE TIP & DRAIN TROUGH DIMENSIONS

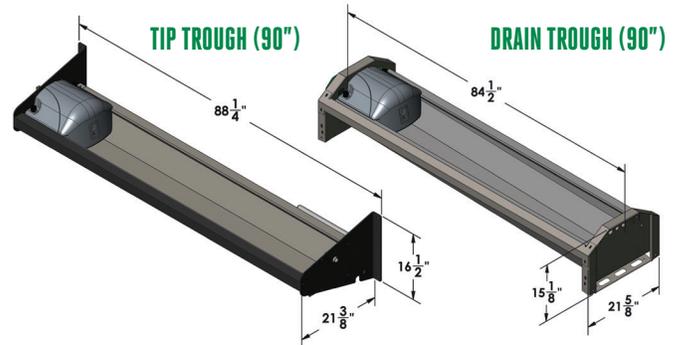


*Frame width and height are the same for each sized tip and drain trough respectively

PART NUMBER	DESCRIPTION
54545	WATERER - SS SHALLOW TIP TROUGH - 60" C/W WALL MOUNT AND FLOAT
54796	WATERER - SS SHALLOW TIP TROUGH - 90" C/W WALL MOUNT AND FLOAT
54546	WATERER - SS SHALLOW TROUGH - 60" C/W WALL MOUNT, FLOAT, 4" DRAIN
55434	WATERER - SS SHALLOW TROUGH - 90" C/W WALL MOUNT, FLOAT, 4" DRAIN
56962	WATERER - SS SHALLOW TROUGH - 120" C/W WALL MOUNT, FLOAT, 4" DRAIN

DLS > TIP TROUGHS (SEE DLS TIP TROUGH BROCHURE FOR MORE)

SHALLOW STAINLESS STEEL TIP TROUGHS

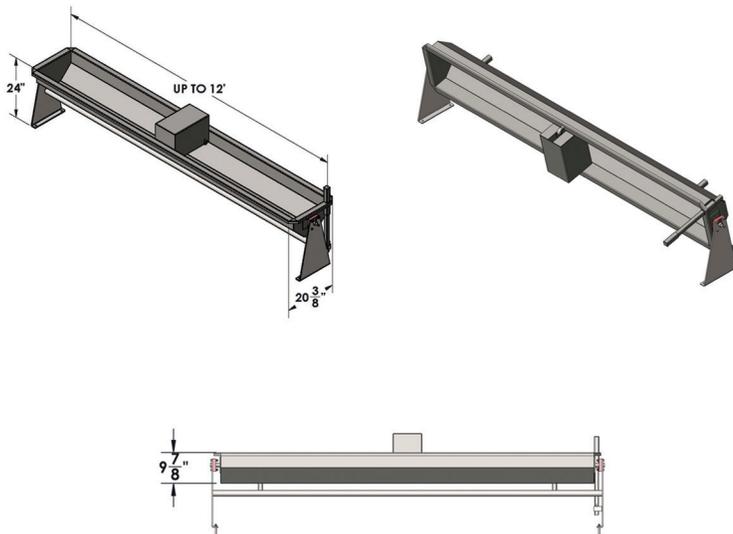


DLS TIP TROUGH KEY FEATURES


- ALL STAINLESS STEEL (GRADE 304)
- HEAVY DUTY 11 GAUGE STEEL
- WALL AND FLOOR MOUNT OPTIONS (RANGING FROM 2' - 12')
- HIGH FLOW RATE - 50 GPM AT 30 PSI
- CUSTOM SIZING AVAILABLE




LA BUVETTE > DIMENSION DRAWINGS

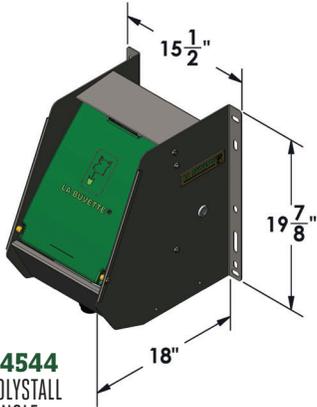


54544
POLYSTALL
SINGLE

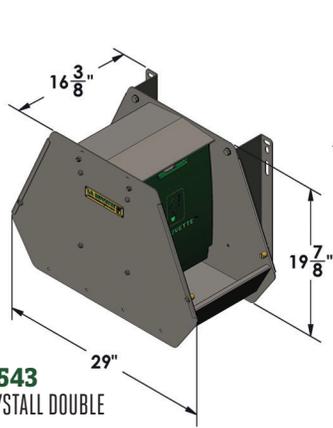


54543
POLYSTALL
DOUBLE



54938
NORMANDY (NO STAND)

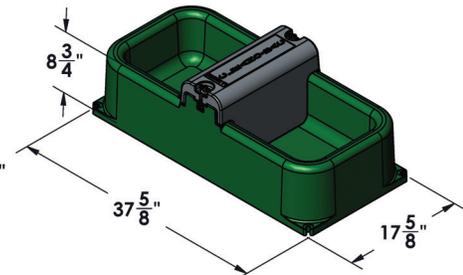


55075
CLEANOBAC

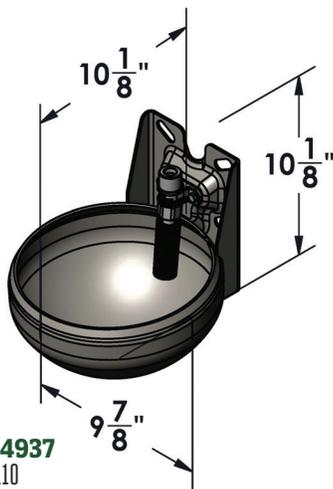


54937
F110




54548
MULTI ACCESS

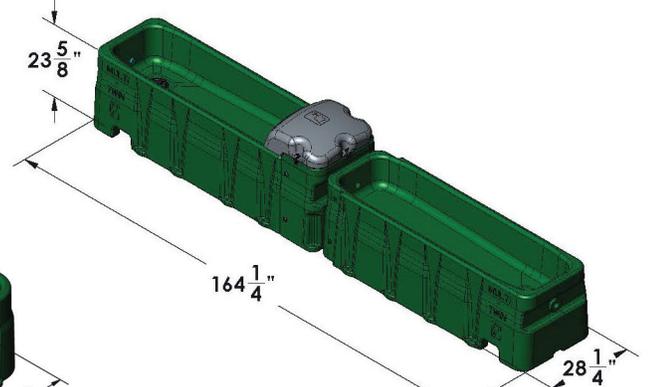


55133
MULTI TWIN
DOUBLE

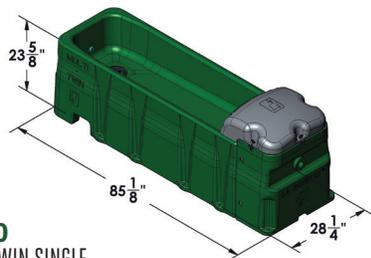


55570
MULTI TWIN
SINGLE

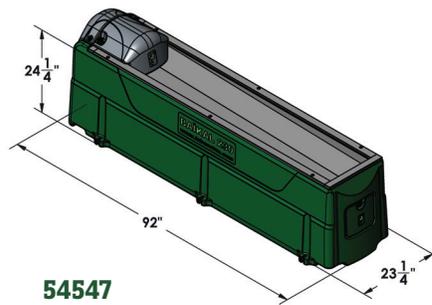


54547
BAIKAL 230

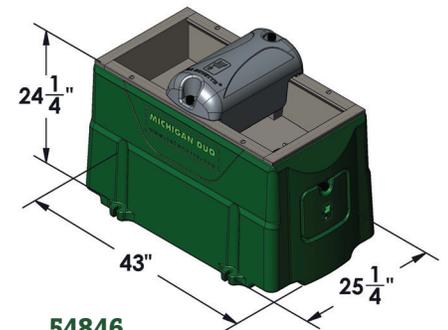


54846
MICHIGAN
DUO

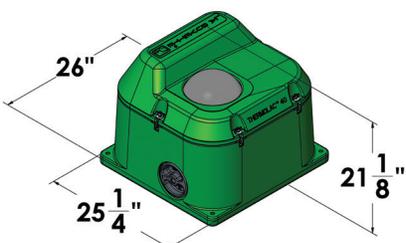


55134
THERMOLAC
40

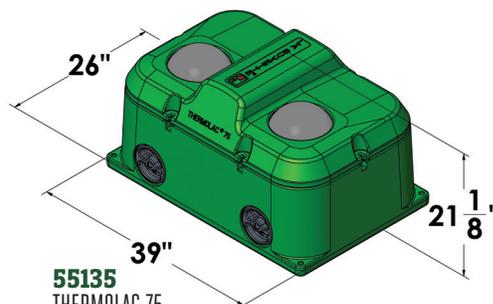

55135
THERMOLAC
75

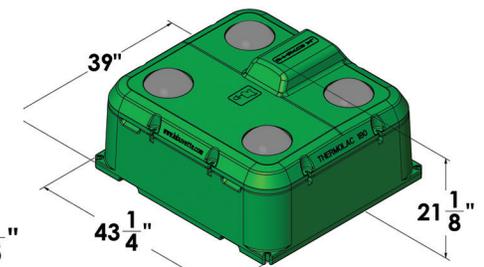

55136
THERMOLAC
180



DAIRY LANE
SYSTEMS LTD.

AUTHORIZED DEALER



Since 1990, DLS has strategically partnered with innovative dairy equipment companies worldwide to provide the most complete product offering on the market. Over the years, DLS has further expanded upon its product line by designing and fabricating quality products of its own. This product portfolio, coupled with over 30 years of experience in dairy barn design, construction, and service, has enabled DLS to become a progressive leader in today's evolving dairy industry.



- DLS Panel Fans
- DLS Exhaust Fans
- DLS Curtains
- DLS Parlour Cabinets & Stalls
- DLS Crowd & Sort Gates
- DLS Specialty Gates
- Jourdain Headlocks & Stabling
- DLS & La Buvette Drinkers
- Easy Swing Cow Brushes

Stay Connected With DLS!

E-Newsletter Subscription @ www.dairylane.ca/subscribe



6403 Egremont Drive | Komoka, ON. | N0L 1R0 | Canada
 TELEPHONE: 519-666-1404 | TOLL-FREE: 1-800-361-2303 | FAX: 519-666-0627
 EMAIL: info@dairylane.ca | WEB: www.dlsbarnsolutions.ca